

Research Article

Uniform Stability Analysis of Fractional-Order BAM Neural Networks with Delays in the Leakage Terms

Xujun Yang,¹ Qiankun Song,² Yurong Liu,^{3,4} and Zhenjiang Zhao⁵

¹ College of Information Science & Engineering, Chongqing Jiaotong University, Chongqing 400074, China

² Department of Mathematics, Chongqing Jiaotong University, Chongqing 400074, China

³ Department of Mathematics, Yangzhou University, Yangzhou 225002, China

⁴ Communication Systems and Networks (CSN) Research Group, Faculty of Engineering, King Abdulaziz University, Jeddah 21589, Saudi Arabia

⁵ Department of Mathematics, Huzhou Teachers College, Huzhou 313000, China

Correspondence should be addressed to Qiankun Song; qiankunsong@163.com

Received 25 May 2014; Accepted 7 June 2014; Published 30 June 2014

Academic Editor: Xiao He

Copyright © 2014 Xujun Yang et al. This is an open access article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

A class of fractional-order BAM neural networks with delays in the leakage terms is considered. By using inequality technique and analysis method, several delay-dependent sufficient conditions are established to ensure the uniform stability of such networks. Moreover, the sufficient conditions guaranteeing the existence, uniqueness, and stability of the equilibrium point are also obtained. In addition, three simulation examples are given to demonstrate the effectiveness of the obtained results.

1. Introduction

The bidirectional associative memory (BAM) neural networks models, first proposed and studied by Kosko [1], have been widely applied within various engineering and scientific fields such as pattern recognition, signal and image processing, artificial intelligence, and combinatorial optimization [2]. In such applications, it is of prime importance to ensure that the designed neural networks are stable [3].

In hardware implementation of a neural network using analog electronic circuits, time delay will be inevitable and occur in the signal transmission among the neurons [4], which will affect the stability of the neural system and may lead to some complex dynamic behaviors such as oscillation, divergence, chaos, and instability or other poor performances of the neural networks [5]. In this case, the time delay may substantially affect the performance of the recurrent neural networks. Therefore, the study of stability for delayed neural networks is of both theoretical and practical importance. In the past few decades, a considerable number of sufficient conditions on the existence, uniqueness, and stability

of equilibrium point for delayed BAM neural networks were reported under some assumptions; for example, see [2–17] and references therein.

In recent years, since the theory and application of fractional differential equations gradually developed [18–20], efforts have been made to study the complex dynamics of fractional-order neural networks. In [21], the authors firstly introduced a new class of cellular neural networks with fractional order. The peculiarity of the new cellular neural networks model consisted in replacing the traditional first order cell with a noninteger order one. The introduction of fractional-order cells, with a suitable choice of the coupling parameters, led to the onset of chaos in a two-cell system of a total order of less than three. A theoretical approach, based on the interaction between equilibrium points and limit cycles, was used to discover chaotic motions in fractional cellular neural networks. In [22], the authors investigated the existence of chaos by using the harmonic balance theory. A circuit realization of the proposed fractional two-cell chaotic cellular neural networks was reported and the corresponding strange attractor was also shown. In [23], the authors presented

an algorithm of numerical solution for fractional differential equations and investigated chaos control and synchronization in a fractional neuron network system. In [24], the authors proposed a fractional-order Hopfield neural network and investigated its stability by using energy function. In [25], a new type of stability and synchronization, α -exponential stability and α -synchronization, was investigated for a class of fractional-order neural networks. Several criteria were derived for such kind of stability of the addressed networks by handling a new fractional-order differential inequality. In [26], chaos and hyperchaos for fractional-order cellular neural networks were investigated by means of numerical simulations. The existence of chaotic and hyperchaotic attractors was verified with the related Lyapunov exponent spectrum, bifurcation diagram, and phase portraits. In [27], the authors investigated stability, multistability, bifurcations, and chaos for fractional-order Hopfield neural networks. In [28], the synchronization problem was studied for a class of fractional-order chaotic neural networks. By using the Mittag-Leffler function, M-matrix and linear feedback control, a sufficient condition was developed ensuring the synchronization of such neural models with the Caputo fractional derivatives. In [29], a class of fractional-order neural networks with delay was considered; a sufficient condition was established for the uniform stability of such networks. Moreover, the existence, uniqueness, and stability of its equilibrium point were also proved. In [30], the authors introduced memristor-based fractional-order neural networks. The conditions on the global Mittag-Leffler stability and synchronization were established by using Lyapunov method for these networks. In [31], the authors investigated the finite-time stability for Caputo fractional neural networks with distributed delay and established a delay-dependent stability criterion by using the theory of fractional calculus and generalized Gronwall-Bellman inequality approach. In [32], the global projective synchronization for fractional-order neural networks was investigated. Based on the preparation and some analysis techniques, several criteria were obtained to realize projective synchronization of fractional-order neural networks via combining open loop control and adaptive control.

Recently, some authors considered the uniform stability of delayed neural networks; for example, see [33–36] and references therein. In [33], the local uniform stability of competitive neural networks with different time-scales under vanishing perturbations was investigated; several stability conditions were established based on Gershgorin's Theorem. In [34], the authors considered the uniform asymptotic stability and global asymptotic stability of the equilibrium point for time-delays Hopfield neural networks. Several criteria of the system were derived by using the Lyapunov functional method and the linear matrix inequality approach for estimating the upper bound of the derivative of Lyapunov functional. In [35], the authors showed the uniform stability and existence and uniqueness of the equilibrium point of the fractional-order complex-valued neural networks with time delays firstly. In [36], the authors discuss the existence and global uniform asymptotic stability of almost periodic solutions for cellular neural networks. By utilizing the theory of the almost periodic differential equation and

the Lyapunov functionals method, some sufficient conditions were obtained to ensure the existence and global uniform asymptotic stability. To the best of our knowledge, however, there are few results on the uniform stability analysis of fractional-order BAM neural networks.

Motivated by the above discussions, the objective of this paper is to study the uniform stability analysis of fractional-order BAM neural networks with delays in the leakage terms. In order to demonstrate the stability of our proposed model, a novel norm which can be found in [29, 35] will be introduced, and several delay-dependent sufficient conditions ensuring the uniform stability of our model will be established. Incidentally, when it comes to the proof of the existence, uniqueness, and stability of the equilibrium point of the proposed model, we will utilize the common norm for convenience.

The rest of the paper is structured as follows. In Section 2, we will present the proposed model and recall some necessary definitions and lemmas. In Section 3, a sufficient criterion ensuring the uniform stability of such neural networks is presented and the existence and uniqueness of the equilibrium of the model is also demonstrated. Three numerical examples are presented to manifest the effectiveness of our theoretical results in Section 4. Finally, the paper is concluded in Section 5.

2. Model Description and Preliminaries

In this paper, we consider the following fractional-order BAM neural networks with delays in the leakage terms:

$$\begin{aligned} D^\alpha x_i(t) = & -a_i x_i(t - \sigma) + \sum_{j=1}^m c_{ij} F_j(y_j(t)) \\ & + \sum_{j=1}^m p_{ij} V_j(y_j(t - \tau)) + I_i, \quad i = 1, 2, \dots, n, \end{aligned} \quad (1)$$

$$\begin{aligned} D^\alpha y_j(t) = & -b_j y_j(t - \sigma) + \sum_{i=1}^n d_{ji} G_i(x_i(t)) \\ & + \sum_{i=1}^n q_{ji} U_i(x_i(t - \tau)) + J_j, \quad j = 1, 2, \dots, m, \end{aligned}$$

or in the vector form

$$\begin{aligned} D^\alpha x(t) = & -Ax(t - \sigma) + CF(y(t)) + PV(y(t - \tau)) + I, \\ D^\alpha y(t) = & -By(t - \sigma) + DG(x(t)) + QU(x(t - \tau)) + J, \end{aligned} \quad (2)$$

where D^α denotes Caputo fractional derivative of order α , $0 < \alpha < 1$; $x(t) = (x_1(t), x_2(t), \dots, x_n(t))^T \in \mathbb{R}^n$, $y(t) = (y_1(t), y_2(t), \dots, y_m(t))^T \in \mathbb{R}^m$, $x_i(t)$, and $y_j(t)$ are the state of the i th neuron from the neural field F_X and the j th neuron from the neural field F_Y at time t , respectively; $F_j(y)$ and $V_j(y)$ denote the activation functions of the j th neuron from the neural field F_Y and $G_i(x)$ and $U_i(x)$ denote the activation functions of the i th neuron from the neural field F_X ; I_i and

J_j are constants, which denote the external inputs on the i th neuron from F_X and the j th neuron from F_Y , respectively; the positive constants a_i and b_j denote the rates with which the i th neuron from the neural field F_X and the j th neuron from the neural field F_Y will reset their potential to the resting state in isolation when disconnected from the networks and external inputs, respectively; the constants c_{ij} , p_{ij} , d_{ji} , and q_{ji} denote the connection strengths; the nonnegative constants σ and τ denote the leakage delay and the transmission delay, respectively; $A = \text{diag}(a_1, a_2, \dots, a_n)$ and $B = \text{diag}(b_1, b_2, \dots, b_m)$ are diagonal matrices, C , D , P , and Q are the connection weight matrices; and $I = (I_1, I_2, \dots, I_n)^T$ and $J = (J_1, J_2, \dots, J_m)^T$ are the external inputs.

The initial conditions associated with system (1) are of the form

$$\begin{aligned} x_i(s) &= \psi_i(s), \quad s \in [-\gamma, 0], \quad i = 1, 2, \dots, n, \\ y_j(s) &= \phi_j(s), \quad s \in [-\gamma, 0], \quad j = 1, 2, \dots, m, \end{aligned} \quad (3)$$

where $\gamma = \max\{\sigma, \tau\}$, and it is usually assumed that $\psi_i(s), \phi_j(s) \in C([-\gamma, 0], \mathbb{R})$, $i = 1, 2, \dots, n$, and $j = 1, 2, \dots, m$, with the norm given by $\|\psi(t)\| = \sum_{i=1}^n \sup_{t \in [-\gamma, 0]} \{e^{-t} |\psi_i(t)|\}$ and $\|\phi(t)\| = \sum_{j=1}^m \sup_{t \in [-\gamma, 0]} \{e^{-t} |\phi_j(t)|\}$.

Throughout this paper, we make the following assumption.

(H) The activation functions $F_j(\cdot)$, $Q_i(\cdot)$, $V_j(\cdot)$, and $U_i(\cdot)$ are Lipschitz continuous; that is, there exist constants $F_j > 0$, $G_i > 0$, $V_j > 0$, and $U_i > 0$ such that

$$\begin{aligned} |F_j(u) - F_j(v)| &\leq F_j |u - v|, \\ |G_i(u) - G_i(v)| &\leq G_i |u - v|, \\ |V_j(u) - V_j(v)| &\leq V_j |u - v|, \\ |U_i(u) - U_i(v)| &\leq U_i |u - v|, \end{aligned} \quad (4)$$

for any $u, v \in \mathbb{R}$, $i = 1, 2, \dots, n$, and $j = 1, 2, \dots, m$.

To prove our results, the following definitions and lemma are necessary.

Definition 1 (see [18]). The Riemann-Liouville fractional integral with fractional-order $\alpha > 0$ of function $f(t)$ is defined as follows:

$${}_{t_0} I_t^\alpha f(t) = \frac{1}{\Gamma(\alpha)} \int_{t_0}^t (t - \tau)^{\alpha-1} f(\tau) d\tau, \quad (5)$$

where $\Gamma(\cdot)$ is the Gamma function and $\Gamma(\tau) = \int_0^\infty t^{\tau-1} e^{-t} dt$.

Definition 2 (see [18]). The Caputo fractional derivative of fractional-order α of function $f(t)$ is defined as follows:

$$\begin{aligned} {}^C_{t_0} D_t^\alpha f(t) &= {}_{t_0} I_t^{n-\alpha} \frac{d^n}{dt^n} f(t) \\ &= \frac{1}{\Gamma(n-\alpha)} \int_{t_0}^t (t - \tau)^{n-\alpha-1} f^{(n)}(\tau) d\tau, \end{aligned} \quad (6)$$

where n is the first integer greater than α ; that is, $n-1 < \alpha < n$.

Particularly, when $0 < \alpha < 1$,

$$D^\alpha f(t) = \frac{1}{\Gamma(1-\alpha)} \int_{t_0}^t (t - \tau)^{-\alpha} f'(\tau) d\tau. \quad (7)$$

Definition 3. The solution of system (1) is said to be uniformly stable if for any $\varepsilon > 0$, there exists $\delta = \delta(\varepsilon) > 0$ such that, for any two solutions $(x(t), y(t))^T, (\bar{x}(t), \bar{y}(t))^T$, of system (1) with initial functions $(\psi(t), \phi(t))^T, (\bar{\psi}(t), \bar{\phi}(t))^T$, respectively, it holds that

$$\|\bar{x}(t) - x(t)\| < \varepsilon, \quad \|\bar{y}(t) - y(t)\| < \varepsilon, \quad (8)$$

for all $t \geq 0$, whenever

$$\|\bar{\psi}(s) - \psi(s)\| < \delta, \quad \|\bar{\phi}(s) - \phi(s)\| < \delta, \quad s \in [-\gamma, 0], \quad (9)$$

where

$$\begin{aligned} \|\bar{\psi}(s) - \psi(s)\| &= \sum_{i=1}^n \sup_{s \in [-\gamma, 0]} \{e^{-s} |\bar{\psi}_i(s) - \psi_i(s)|\}, \\ \|\bar{\phi}(s) - \phi(s)\| &= \sum_{j=1}^m \sup_{s \in [-\gamma, 0]} \{e^{-s} |\bar{\phi}_j(s) - \phi_j(s)|\}, \end{aligned} \quad (10)$$

$$\|\bar{x}(t) - x(t)\| = \sum_{i=1}^n \sup_t \{e^{-t} |\bar{x}_i(t) - x_i(t)|\},$$

$$\|\bar{y}(t) - y(t)\| = \sum_{j=1}^m \sup_t \{e^{-t} |\bar{y}_j(t) - y_j(t)|\}.$$

Lemma 4 (see [20]). Let n be a positive integer such that $n-1 < \alpha < n$; if $y(t) \in C^{n-1}[a, b]$, then

$$I^\alpha D^\alpha y(t) = y(t) - \sum_{k=0}^{n-1} \frac{y^{(k)}(a)}{k!} (t - a)^k. \quad (11)$$

In particular, if $0 < \alpha \leq 1$ and $y(t) \in C[a, b]$, then

$$I^\alpha D^\alpha y(t) = y(t) - y(a). \quad (12)$$

Remark 5. It is noted that when the leakage delay $\sigma = 0$, the system (1) becomes the following fractional-order BAM neural networks with delay

$$\begin{aligned} D^\alpha x_i(t) &= -a_i x_i(t) + \sum_{j=1}^m c_{ij} F_j(y_j(t)) \\ &\quad + \sum_{j=1}^m p_{ij} V_j(y_j(t - \tau)) + I_i, \\ D^\alpha y_j(t) &= -b_j y_j(t) + \sum_{i=1}^n d_{ji} G_i(x_i(t)) \\ &\quad + \sum_{i=1}^n q_{ji} U_i(x_i(t - \tau)) + J_j, \end{aligned} \quad (13)$$

with initial conditions

$$\begin{aligned}x_i(s) &= \psi_i(s), \quad s \in [-\tau, 0], \\y_j(s) &= \phi_j(s), \quad s \in [-\tau, 0],\end{aligned}\quad (14)$$

for $i = 1, 2, \dots, n$, $j = 1, 2, \dots, m$.

3. Main Results

Theorem 6. Under assumption (H), the system (1) is uniformly stable, if $S_1 > 0$, $T_1 > 0$, and $S_1 T_1 > S_2 T_2$ hold, where

$$\begin{aligned}S_1 &= 1 - \max_{1 \leq i \leq n} \{a_i\} e^{-\sigma}, \quad T_1 = 1 - \max_{1 \leq j \leq m} \{b_j\} e^{-\sigma}, \\S_2 &= \sum_{i=1}^n \max_{1 \leq j \leq m} \{|c_{ij}| F_j\} + \sum_{i=1}^n \max_{1 \leq j \leq m} \{|p_{ij}| V_j\} e^{-\tau}, \\T_2 &= \sum_{j=1}^m \max_{1 \leq i \leq n} \{|d_{ji}| G_i\} + \sum_{j=1}^m \max_{1 \leq i \leq n} \{|q_{ji}| U_i\} e^{-\tau}.\end{aligned}\quad (15)$$

Proof. Assume that $(x(t), y(t))^T = (x_1(t), \dots, x_n(t), y_1(t), \dots, y_m(t))^T$ and $(\bar{x}(t), \bar{y}(t))^T = (\bar{x}_1(t), \dots, \bar{x}_n(t), \bar{y}_1(t), \dots, \bar{y}_m(t))^T$ are any two solutions of system (1) with the initial conditions (3), then

$$\begin{aligned}D^\alpha (\bar{x}_i(t) - x_i(t)) &= -a_i (\bar{x}_i(t - \sigma) - x_i(t - \sigma)) \\&\quad + \sum_{j=1}^m c_{ij} (F_j(\bar{y}_j(t)) - F_j(y_j(t))) \\&\quad + \sum_{j=1}^m p_{ij} (V_j(\bar{y}_j(t - \tau)) - V_j(y_j(t - \tau))), \\&\quad i = 1, 2, \dots, n, \\D^\alpha (\bar{y}_j(t) - y_j(t)) &= -b_j (\bar{y}_j(t - \sigma) - y_j(t - \sigma)) \\&\quad + \sum_{i=1}^n d_{ji} (G_i(\bar{x}_i(t)) - G_i(x_i(t))) \\&\quad + \sum_{i=1}^n q_{ji} (U_i(\bar{x}_i(t - \tau)) - U_i(x_i(t - \tau))), \\&\quad j = 1, 2, \dots, m.\end{aligned}\quad (16)$$

From Lemma 4, we can obtain

$$\begin{aligned}\bar{x}_i(t) - x_i(t) &= \bar{\psi}_i(0) - \psi_i(0) \\&\quad + I^\alpha [-a_i (\bar{x}_i(t - \sigma) - x_i(t - \sigma)) \\&\quad + \sum_{j=1}^m c_{ij} (F_j(\bar{y}_j(t)) - F_j(y_j(t)))\end{aligned}$$

$$\begin{aligned}&+ \sum_{j=1}^m p_{ij} (V_j(\bar{y}_j(t - \tau)) - V_j(y_j(t - \tau)))], \\&\quad i = 1, 2, \dots, n, \\&\bar{y}_j(t) - y_j(t) = \bar{\phi}_j(0) - \phi_j(0) \\&\quad + I^\alpha [-b_j (\bar{y}_j(t - \sigma) - y_j(t - \sigma)) \\&\quad + \sum_{i=1}^n d_{ji} (G_i(\bar{x}_i(t)) - G_i(x_i(t))) \\&\quad + \sum_{i=1}^n q_{ji} (U_i(\bar{x}_i(t - \tau)) - U_i(x_i(t - \tau)))], \\&\quad j = 1, 2, \dots, m.\end{aligned}\quad (17)$$

Further, we have that

$$\begin{aligned}&e^{-t} |\bar{x}_i(t) - x_i(t)| \\&\leq e^{-t} |\bar{\psi}_i(0) - \psi_i(0)| + \frac{1}{\Gamma(\alpha)} e^{-t} \\&\quad \times \int_0^t (t-s)^{\alpha-1} \\&\quad \times [a_i |\bar{x}_i(s - \sigma) - x_i(s - \sigma)| \\&\quad + \sum_{j=1}^m |c_{ij}| |F_j(\bar{y}_j(s)) - F_j(y_j(s))| \\&\quad + \sum_{j=1}^m |p_{ij}| |V_j(\bar{y}_j(s - \tau)) - V_j(y_j(s - \tau))|] ds, \\&e^{-t} |\bar{y}_j(t) - y_j(t)| \\&\leq e^{-t} |\bar{\phi}_j(0) - \phi_j(0)| + \frac{1}{\Gamma(\alpha)} e^{-t} \\&\quad \times \int_0^t (t-s)^{\alpha-1} \\&\quad \times [b_j |\bar{y}_j(s - \sigma) - y_j(s - \sigma)| \\&\quad + \sum_{i=1}^n |d_{ji}| |G_i(\bar{x}_i(s)) - G_i(x_i(s))| \\&\quad + \sum_{i=1}^n |q_{ji}| |U_i(\bar{x}_i(s - \tau)) - U_i(x_i(s - \tau))|] ds,\end{aligned}\quad (18)$$

for $i = 1, 2, \dots, n$, $j = 1, 2, \dots, m$.

(19)

It follows from assumption (H) and inequality (18) that

$$\begin{aligned}
& e^{-t} |\bar{x}_i(t) - x_i(t)| \\
& \leq e^{-t} |\bar{\psi}_i(0) - \psi_i(0)| + a_i \frac{1}{\Gamma(\alpha)} \\
& \quad \times \int_0^t (t-s)^{\alpha-1} e^{-(t-s+\sigma)} e^{-(s-\sigma)} \\
& \quad \times |\bar{x}_i(s-\sigma) - x_i(s-\sigma)| ds \\
& \quad + \sum_{j=1}^m |c_{ij}| \frac{1}{\Gamma(\alpha)} \\
& \quad \times \int_0^t (t-s)^{\alpha-1} e^{-(t-s)} e^{-s} \\
& \quad \times |F_j(\bar{y}_j(s)) - F_j(y_j(s))| ds \\
& \quad + \sum_{j=1}^m |p_{ij}| \frac{1}{\Gamma(\alpha)} \\
& \quad \times \int_0^t (t-s)^{\alpha-1} e^{-(t-s+\tau)} e^{-(s-\tau)} \\
& \quad \times |V_j(\bar{y}_j(s-\tau)) - V_j(y_j(s-\tau))| ds \\
& \leq e^{-t} |\bar{\psi}_i(0) - \psi_i(0)| + a_i \frac{1}{\Gamma(\alpha)} \\
& \quad \times \int_0^t (t-s)^{\alpha-1} e^{-(t-s+\sigma)} e^{-(s-\sigma)} \\
& \quad \times |\bar{x}_i(s-\sigma) - x_i(s-\sigma)| ds \\
& \quad + \sum_{j=1}^m |c_{ij}| F_j \frac{1}{\Gamma(\alpha)} \\
& \quad \times \int_0^t (t-s)^{\alpha-1} e^{-(t-s)} e^{-s} |\bar{y}_j(s) - y_j(s)| ds \\
& \quad + \sum_{j=1}^m |p_{ij}| V_j \frac{1}{\Gamma(\alpha)} \\
& \quad \times \int_0^t (t-s)^{\alpha-1} e^{-(t-s+\tau)} e^{-(s-\tau)} \\
& \quad \times |\bar{y}_j(s-\tau) - y_j(s-\tau)| ds \\
& = e^{-t} |\bar{\psi}_i(0) - \psi_i(0)| + a_i \frac{1}{\Gamma(\alpha)} \\
& \quad \times \int_0^\sigma (t-s)^{\alpha-1} e^{-(t-s+\sigma)} e^{-(s-\sigma)} \\
& \quad \times |\bar{\psi}_i(s-\sigma) - \psi_i(s-\sigma)| ds \\
& \quad + a_i \frac{1}{\Gamma(\alpha)} \int_\sigma^t (t-s)^{\alpha-1} e^{-(t-s+\sigma)} e^{-(s-\sigma)} \\
& \quad \times |\bar{x}_i(s-\sigma) - x_i(s-\sigma)| ds
\end{aligned}$$

$$\begin{aligned}
& + \sum_{j=1}^m |c_{ij}| F_j \frac{1}{\Gamma(\alpha)} \\
& \quad \times \int_0^t (t-s)^{\alpha-1} e^{-(t-s)} e^{-s} |\bar{y}_j(s) - y_j(s)| ds \\
& \quad + \sum_{j=1}^m |p_{ij}| V_j \frac{1}{\Gamma(\alpha)} \\
& \quad \times \int_0^\tau (t-s)^{\alpha-1} e^{-(t-s+\tau)} e^{-(s-\tau)} \\
& \quad \times |\bar{\phi}_j(s-\tau) - \phi_j(s-\tau)| ds \\
& \quad + \sum_{j=1}^m |p_{ij}| V_j \frac{1}{\Gamma(\alpha)} \\
& \quad \times \int_\tau^t (t-s)^{\alpha-1} e^{-(t-s+\tau)} e^{-(s-\tau)} \\
& \quad \times |\bar{y}_j(s-\tau) - y_j(s-\tau)| ds \\
& = e^{-t} |\bar{\psi}_i(0) - \psi_i(0)| + a_i \frac{1}{\Gamma(\alpha)} \\
& \quad \times \int_{-\sigma}^0 (t-\gamma-\sigma)^{\alpha-1} e^{-(t-\gamma)} e^{-\gamma} \\
& \quad \times |\bar{\psi}_i(\gamma) - \psi_i(\gamma)| d\gamma \\
& \quad + a_i \frac{1}{\Gamma(\alpha)} \int_0^{t-\sigma} (t-\gamma-\sigma)^{\alpha-1} e^{-(t-\gamma)} e^{-\gamma} \\
& \quad \times |\bar{x}_i(\gamma) - x_i(\gamma)| d\gamma \\
& \quad + \sum_{j=1}^m |c_{ij}| F_j \frac{1}{\Gamma(\alpha)} \\
& \quad \times \int_0^t (t-s)^{\alpha-1} e^{-(t-s)} e^{-s} |\bar{y}_j(s) - y_j(s)| ds \\
& \quad + \sum_{j=1}^m |p_{ij}| V_j \frac{1}{\Gamma(\alpha)} \\
& \quad \times \int_{-\tau}^0 (t-\beta-\tau)^{\alpha-1} e^{-(t-\beta)} e^{-\beta} |\bar{\phi}_j(\beta) - \phi_j(\beta)| d\beta \\
& \quad + \sum_{j=1}^m |p_{ij}| V_j \frac{1}{\Gamma(\alpha)} \\
& \quad \times \int_0^{t-\tau} (t-\beta-\tau)^{\alpha-1} e^{-(t-\beta)} e^{-\beta} |\bar{y}_j(\beta) - y_j(\beta)| d\beta \\
& \leq \sup_{t \in [-\gamma, 0]} \{e^{-t} |\bar{\psi}_i(t) - \psi_i(t)|\} \\
& \quad + a_i \sup_{t \in [-\gamma, 0]} \{e^{-t} |\bar{\psi}_i(t) - \psi_i(t)|\} e^{-\sigma}
\end{aligned}$$

$$\begin{aligned}
& \times \frac{1}{\Gamma(\alpha)} \int_{t-\sigma}^t \theta^{\alpha-1} e^{-\theta} d\theta \\
& + a_i \sup_t \left\{ e^{-t} |\bar{x}_i(t) - x_i(t)| \right\} e^{-\sigma} \\
& \times \frac{1}{\Gamma(\alpha)} \int_0^{t-\sigma} \theta^{\alpha-1} e^{-\theta} d\theta \\
& + \max_{1 \leq j \leq m} \left\{ |c_{ij}| F_j \right\} \sum_{j=1}^m \sup_t \left\{ e^{-t} |\bar{y}_j(t) - y_j(t)| \right\} \\
& \times \frac{1}{\Gamma(\alpha)} \int_0^t u^{\alpha-1} e^{-u} du \\
& + \max_{1 \leq j \leq m} \left\{ |p_{ij}| V_j \right\} \sum_{j=1}^m \sup_{t \in [-\gamma, 0]} \left\{ e^{-t} |\bar{\phi}_j(t) - \phi_j(t)| \right\} e^{-\tau} \\
& \times \frac{1}{\Gamma(\alpha)} \int_{t-\tau}^t v^{\alpha-1} e^{-v} dv \\
& + \max_{1 \leq j \leq m} \left\{ |p_{ij}| V_j \right\} \sum_{j=1}^m \sup_t \left\{ e^{-t} |\bar{y}_j(t) - y_j(t)| \right\} e^{-\tau} \\
& \times \frac{1}{\Gamma(\alpha)} \int_0^{t-\tau} v^{\alpha-1} e^{-v} dv \\
& \leq \sup_{t \in [-\gamma, 0]} \left\{ e^{-t} |\bar{\psi}_i(t) - \psi_i(t)| \right\} \\
& + a_i \sup_{t \in [-\gamma, 0]} \left\{ e^{-t} |\bar{\psi}_i(t) - \psi_i(t)| \right\} e^{-\sigma} \\
& + a_i \sup_t \left\{ e^{-t} |\bar{x}_i(t) - x_i(t)| \right\} e^{-\sigma} \\
& + \max_{1 \leq j \leq m} \left\{ |c_{ij}| F_j \right\} \sum_{j=1}^m \sup_t \left\{ e^{-t} |\bar{y}_j(t) - y_j(t)| \right\} \\
& + \max_{1 \leq j \leq m} \left\{ |p_{ij}| V_j \right\} \sum_{j=1}^m \sup_{t \in [-\gamma, 0]} \left\{ e^{-t} |\bar{\phi}_j(t) - \phi_j(t)| \right\} e^{-\tau} \\
& + \max_{1 \leq j \leq m} \left\{ |p_{ij}| V_j \right\} \sum_{j=1}^m \sup_t \left\{ e^{-t} |\bar{y}_j(t) - y_j(t)| \right\} e^{-\tau} \\
& = \sup_{t \in [-\gamma, 0]} \left\{ e^{-t} |\bar{\psi}_i(t) - \psi_i(t)| \right\} \\
& + a_i e^{-\sigma} \sup_{t \in [-\gamma, 0]} \left\{ e^{-t} |\bar{\psi}_i(t) - \psi_i(t)| \right\} \\
& + a_i e^{-\sigma} \sup_t \left\{ e^{-t} |\bar{x}_i(t) - x_i(t)| \right\} \\
& + \max_{1 \leq j \leq m} \left\{ |c_{ij}| F_j \right\} \|\bar{y}(t) - y(t)\| \\
& + \max_{1 \leq j \leq m} \left\{ |p_{ij}| V_j \right\} e^{-\tau} \|\bar{\phi}(t) - \phi(t)\| \\
& + \max_{1 \leq j \leq m} \left\{ |p_{ij}| V_j \right\} e^{-\tau} \|\bar{y}(t) - y(t)\|.
\end{aligned} \tag{20}$$

From (20), we can get

$$\begin{aligned}
\|\bar{x}(t) - x(t)\| &= \sum_{i=1}^n \sup_t \left\{ e^{-t} |\bar{x}_i(t) - x_i(t)| \right\} \\
&\leq \|\bar{\psi}(t) - \psi(t)\| + \max_{1 \leq i \leq n} \{a_i\} e^{-\sigma} \|\bar{\psi}(t) - \psi(t)\| \\
&\quad + \max_{1 \leq i \leq n} \{a_i\} e^{-\sigma} \|\bar{x}(t) - x(t)\| \\
&\quad + \sum_{i=1}^n \max_{1 \leq j \leq m} \left\{ |c_{ij}| F_j \right\} \|\bar{y}(t) - y(t)\| \\
&\quad + \sum_{i=1}^n \max_{1 \leq j \leq m} \left\{ |p_{ij}| V_j \right\} e^{-\tau} \|\bar{\phi}(t) - \phi(t)\| \\
&\quad + \sum_{i=1}^n \max_{1 \leq j \leq m} \left\{ |p_{ij}| V_j \right\} e^{-\tau} \|\bar{y}(t) - y(t)\|,
\end{aligned} \tag{21}$$

which implies

$$\begin{aligned}
&\|\bar{x}(t) - x(t)\| \\
&\leq \frac{\sum_{i=1}^n \max_{1 \leq j \leq m} \left\{ |c_{ij}| F_j \right\} + \sum_{i=1}^n \max_{1 \leq j \leq m} \left\{ |p_{ij}| V_j \right\} e^{-\tau}}{1 - \max_{1 \leq i \leq n} \{a_i\} e^{-\sigma}} \\
&\quad \times \|\bar{y}(t) - y(t)\| + \frac{1 + \max_{1 \leq i \leq n} \{a_i\} e^{-\sigma}}{1 - \max_{1 \leq i \leq n} \{a_i\} e^{-\sigma}} \\
&\quad \times \|\bar{\psi}(t) - \psi(t)\| + \frac{\sum_{i=1}^n \max_{1 \leq j \leq m} \left\{ |p_{ij}| V_j \right\} e^{-\tau}}{1 - \max_{1 \leq i \leq n} \{a_i\} e^{-\sigma}} \\
&\quad \times \|\bar{\phi}(t) - \phi(t)\| \\
&= \frac{S_2}{S_1} \|\bar{y}(t) - y(t)\| + \frac{S_3}{S_1} \|\bar{\psi}(t) - \psi(t)\| \\
&\quad + \frac{S_4}{S_1} \|\bar{\phi}(t) - \phi(t)\|,
\end{aligned} \tag{22}$$

where $S_3 = 1 + \max_{1 \leq i \leq n} \{a_i\} e^{-\sigma}$, $S_4 = \sum_{i=1}^n \max_{1 \leq j \leq m} \{|p_{ij}| V_j\} e^{-\tau}$.

Similarly, it follows from assumption (H) and inequality (19) that

$$\begin{aligned}
&\|\bar{y}(t) - y(t)\| \\
&\leq \frac{\sum_{j=1}^m \max_{1 \leq i \leq n} \left\{ |d_{ji}| G_i \right\} + \sum_{j=1}^m \max_{1 \leq i \leq n} \left\{ |q_{ji}| U_i \right\} e^{-\tau}}{1 - \max_{1 \leq j \leq m} \{b_j\} e^{-\sigma}} \\
&\quad \times \|\bar{x}(t) - x(t)\| + \frac{1 + \max_{1 \leq j \leq m} \{b_j\} e^{-\sigma}}{1 - \max_{1 \leq j \leq m} \{b_j\} e^{-\sigma}}
\end{aligned}$$

$$\begin{aligned}
 & \times \|\bar{\phi}(t) - \phi(t)\| + \frac{\sum_{j=1}^m \max_{1 \leq i \leq n} \{|q_{ji}|U_i\} e^{-\tau}}{1 - \max_{1 \leq j \leq m} \{b_j\} e^{-\sigma}} \\
 & \times \|\bar{\psi}(t) - \psi(t)\| \\
 & = \frac{T_2}{T_1} \|\bar{x}(t) - x(t)\| + \frac{T_3}{T_1} \|\bar{\phi}(t) - \phi(t)\| \\
 & + \frac{T_4}{T_1} \|\bar{\psi}(t) - \psi(t)\|,
 \end{aligned} \tag{23}$$

where $T_3 = 1 + \max_{1 \leq j \leq m} \{b_j\} e^{-\sigma}$, $T_4 = \sum_{j=1}^m \max_{1 \leq i \leq n} \{|q_{ji}|U_i\} e^{-\tau}$.

Substituting (23) into (22), we can obtain

$$\begin{aligned}
 \|\bar{x}(t) - x(t)\| & \leq \frac{S_2}{S_1} \left[\frac{T_2}{T_1} \|\bar{x}(t) - x(t)\| \right. \\
 & + \frac{T_3}{T_1} \|\bar{\phi}(t) - \phi(t)\| \\
 & + \left. \frac{T_4}{T_1} \|\bar{\psi}(t) - \psi(t)\| \right] \\
 & + \frac{S_3}{S_1} \|\bar{\psi}(t) - \psi(t)\| + \frac{S_4}{S_1} \|\bar{\phi}(t) - \phi(t)\| \\
 & = \frac{S_2 T_2}{S_1 T_1} \|\bar{x}(t) - x(t)\| \\
 & + \frac{S_2 T_4 + S_3 T_1}{S_1 T_1} \|\bar{\psi}(t) - \psi(t)\| \\
 & + \frac{S_2 T_3 + S_4 T_1}{S_1 T_1} \|\bar{\phi}(t) - \phi(t)\|.
 \end{aligned} \tag{24}$$

By using condition $S_1 T_1 > S_2 T_2$, (24) implies

$$\begin{aligned}
 \|\bar{x}(t) - x(t)\| & \leq \frac{S_2 T_4 + S_3 T_1}{S_1 T_1 - S_2 T_2} \|\bar{\psi}(t) - \psi(t)\| \\
 & + \frac{S_2 T_3 + S_4 T_1}{S_1 T_1 - S_2 T_2} \|\bar{\phi}(t) - \phi(t)\|.
 \end{aligned} \tag{25}$$

And, substituting (22) into (23), we can get

$$\begin{aligned}
 \|\bar{y}(t) - y(t)\| & \leq \frac{T_2}{T_1} \left[\frac{S_2}{S_1} \|\bar{y}(t) - y(t)\| \right. \\
 & + \frac{S_3}{S_1} \|\bar{\psi}(t) - \psi(t)\| \\
 & + \left. \frac{S_4}{S_1} \|\bar{\phi}(t) - \phi(t)\| \right] \\
 & + \frac{T_3}{T_1} \|\bar{\phi}(t) - \phi(t)\| + \frac{T_4}{T_1} \|\bar{\psi}(t) - \psi(t)\|
 \end{aligned}$$

$$\begin{aligned}
 & = \frac{T_2 S_2}{T_1 S_1} \|\bar{y}(t) - y(t)\| \\
 & + \frac{T_2 S_4 + T_3 S_1}{T_1 S_1} \|\bar{\phi}(t) - \phi(t)\| \\
 & + \frac{T_2 S_3 + T_4 S_1}{T_1 S_1} \|\bar{\psi}(t) - \psi(t)\|.
 \end{aligned} \tag{26}$$

By using condition $S_1 T_1 > S_2 T_2$, (26) implies

$$\begin{aligned}
 \|\bar{y}(t) - y(t)\| & \leq \frac{T_2 S_4 + T_3 S_1}{T_1 S_1 - T_2 S_2} \|\bar{\phi}(t) - \phi(t)\| \\
 & + \frac{T_2 S_3 + T_4 S_1}{T_1 S_1 - T_2 S_2} \|\bar{\psi}(t) - \psi(t)\|.
 \end{aligned} \tag{27}$$

If we take

$$\begin{aligned}
 \|\bar{\psi}(t) - \psi(t)\| & \leq \frac{\varepsilon_1}{(S_2 T_4 + S_3 T_1) / (S_1 T_1 - S_2 T_2)} = \frac{\varepsilon_1}{2\delta_1}, \\
 \|\bar{\phi}(t) - \phi(t)\| & \leq \frac{\varepsilon_1}{(S_2 T_3 + S_4 T_1) / (S_1 T_1 - S_2 T_2)} = \frac{\varepsilon_1}{2\delta_2},
 \end{aligned} \tag{28}$$

where

$$\delta_1 = \frac{S_2 T_4 + S_3 T_1}{S_1 T_1 - S_2 T_2}, \quad \delta_2 = \frac{S_2 T_3 + S_4 T_1}{S_1 T_1 - S_2 T_2}. \tag{29}$$

From (25), we can obtain

$$\|\bar{x}(t) - x(t)\| \leq \varepsilon_1. \tag{30}$$

If we take

$$\begin{aligned}
 \|\bar{\phi}(t) - \phi(t)\| & \leq \frac{\varepsilon_2}{(T_2 S_4 + T_3 S_1) / (T_1 S_1 - T_2 S_2)} = \frac{\varepsilon_2}{2\delta_3}, \\
 \|\bar{\psi}(t) - \psi(t)\| & \leq \frac{\varepsilon_2}{(T_2 S_3 + T_4 S_1) / (T_1 S_1 - T_2 S_2)} = \frac{\varepsilon_2}{2\delta_4},
 \end{aligned} \tag{31}$$

where

$$\delta_3 = \frac{T_2 S_4 + T_3 S_1}{T_1 S_1 - T_2 S_2}, \quad \delta_4 = \frac{T_2 S_3 + T_4 S_1}{T_1 S_1 - T_2 S_2}, \tag{32}$$

from (27), we can get

$$\|\bar{y}(t) - y(t)\| \leq \varepsilon_2. \tag{33}$$

From (30) and (33), we say that, for any $\varepsilon = \max\{\varepsilon_1, \varepsilon_2\} > 0$, then there exists a constant $\delta = \varepsilon / \max\{\delta_5, \delta_6\} > 0$, $\delta_5 = \max\{\delta_1, \delta_4\}$, or $\delta_6 = \max\{\delta_2, \delta_3\}$ such that $\|\bar{x}(t) - x(t)\| < \varepsilon$, $\|\bar{y}(t) - y(t)\| < \varepsilon$, when $\|\bar{\psi}(t) - \psi(t)\| < \delta$, $\|\bar{\phi}(t) - \phi(t)\| < \delta$, which means that the solution of system (1) is uniformly stable. The proof is completed. $\square$

Theorem 7. Under assumption (H) and the conditions of Theorem 6, the system (1) has a unique equilibrium point, which is uniformly stable if $W_1 < \min_{1 \leq j \leq m} \{b_j\}$ and $W_2 < \min_{1 \leq i \leq n} \{a_i\}$ hold, where

$$\begin{aligned} W_1 &= \sum_{i=1}^n \max_{1 \leq j \leq m} \{ |c_{ij}| F_j \} + \sum_{i=1}^n \max_{1 \leq j \leq m} \{ |p_{ij}| V_j \}, \\ W_2 &= \sum_{j=1}^m \max_{1 \leq i \leq n} \{ |d_{ji}| G_i \} + \sum_{j=1}^m \max_{1 \leq i \leq n} \{ |q_{ji}| U_i \}. \end{aligned} \quad (34)$$

Proof. Let $a_i x_i^* = u_i^*$, $b_j y_j^* = v_j^*$, and construct a mapping $Y(u, v) : \mathbb{R}^{n+m} \rightarrow \mathbb{R}^{n+m}$ defined by

$$\begin{aligned} Y(u, v) &= (Y_1(u, v), Y_2(u, v), \dots, Y_n(u, v), \\ &\quad Y_{n+1}(u, v), Y_{n+2}(u, v), \dots, Y_{n+m}(u, v))^T, \end{aligned} \quad (35)$$

where

$$\begin{aligned} Y_i(u, v) &= \sum_{j=1}^m c_{ij} F_j \left(\frac{v_j}{b_j} \right) + \sum_{j=1}^m p_{ij} V_j \left(\frac{v_j}{b_j} \right) + I_i, \\ Y_{n+j}(u, v) &= \sum_{i=1}^n d_{ji} G_i \left(\frac{u_i}{a_i} \right) + \sum_{i=1}^n q_{ji} U_i \left(\frac{u_i}{a_i} \right) + J_j, \end{aligned} \quad (36)$$

for $i = 1, 2, \dots, n$, $j = 1, 2, \dots, m$.

Now, we will show that $Y(u, v)$ is a contraction mapping on $\mathbb{R}^{n+m}$. In fact, for any two different points $(u, v) = (u_1, \dots, u_n, v_1, \dots, v_m)^T$ and $(\bar{u}, \bar{v}) = (\bar{u}_1, \dots, \bar{u}_n, \bar{v}_1, \dots, \bar{v}_m)^T$, we have

$$\begin{aligned} \|Y(\bar{u}, \bar{v}) - Y(u, v)\| &= \sum_{i=1}^n \left| \sum_{j=1}^m c_{ij} \left(F_j \left(\frac{\bar{v}_j}{b_j} \right) - F_j \left(\frac{v_j}{b_j} \right) \right) \right. \\ &\quad \left. + \sum_{j=1}^m p_{ij} \left(V_j \left(\frac{\bar{v}_j}{b_j} \right) - V_j \left(\frac{v_j}{b_j} \right) \right) \right| \\ &\quad + \sum_{j=1}^m \left| \sum_{i=1}^n d_{ji} \left(G_i \left(\frac{\bar{u}_i}{a_i} \right) - G_i \left(\frac{u_i}{a_i} \right) \right) \right. \\ &\quad \left. + \sum_{i=1}^n q_{ji} \left(U_i \left(\frac{\bar{u}_i}{a_i} \right) - U_i \left(\frac{u_i}{a_i} \right) \right) \right| \\ &\leq \sum_{i=1}^n \left[\sum_{j=1}^m |c_{ij}| F_j \frac{|\bar{v}_j - v_j|}{b_j} + \sum_{j=1}^m |p_{ij}| V_j \frac{|\bar{v}_j - v_j|}{b_j} \right] \\ &\quad + \sum_{j=1}^m \left[\sum_{i=1}^n |d_{ji}| G_i \frac{|\bar{u}_i - u_i|}{a_i} + \sum_{i=1}^n |q_{ji}| U_i \frac{|\bar{u}_i - u_i|}{a_i} \right] \end{aligned}$$

$$\begin{aligned} &\leq \left(\frac{\sum_{i=1}^n \max_{1 \leq j \leq m} \{ |c_{ij}| F_j \} + \sum_{i=1}^n \max_{1 \leq j \leq m} \{ |p_{ij}| V_j \}}{\min_{1 \leq j \leq m} \{ b_j \}} \right) \\ &\quad \times \sum_{j=1}^m |\bar{v}_j - v_j| \\ &\quad + \left(\frac{\sum_{j=1}^m \max_{1 \leq i \leq n} \{ |d_{ji}| G_i \} + \sum_{j=1}^m \max_{1 \leq i \leq n} \{ |q_{ji}| U_i \}}{\min_{1 \leq i \leq n} \{ a_i \}} \right) \\ &\quad \times \sum_{i=1}^n |\bar{u}_i - u_i| \\ &= \frac{W_1}{\min_{1 \leq j \leq m} \{ b_j \}} \sum_{j=1}^m |\bar{v}_j - v_j| + \frac{W_2}{\min_{1 \leq i \leq n} \{ a_i \}} \sum_{i=1}^n |\bar{u}_i - u_i|. \end{aligned} \quad (37)$$

By using conditions $W_1 < \min_{1 \leq j \leq m} \{b_j\}$ and $W_2 < \min_{1 \leq i \leq n} \{a_i\}$, (37) implies

$$\begin{aligned} \|Y(\bar{u}, \bar{v}) - Y(u, v)\| &< \sum_{j=1}^m |\bar{v}_j - v_j| \\ &\quad + \sum_{i=1}^n |\bar{u}_i - u_i| = \|(\bar{u}, \bar{v}) - (u, v)\|, \end{aligned} \quad (38)$$

which implies that $Y(u, v)$ is a contraction mapping on $\mathbb{R}^{n+m}$. Hence, there exists a unique fixed point $(u^*, v^*) = (u_1^*, \dots, u_n^*, v_1^*, \dots, v_m^*)^T$ such that $Y(u^*, v^*) = (u^*, v^*)$; that is

$$\begin{aligned} u_i^* &= \sum_{j=1}^m c_{ij} F_j \left(\frac{v_j^*}{b_j} \right) + \sum_{j=1}^m p_{ij} V_j \left(\frac{v_j^*}{b_j} \right) + I_i, \\ v_j^* &= \sum_{i=1}^n d_{ji} G_i \left(\frac{u_i^*}{a_i} \right) + \sum_{i=1}^n q_{ji} U_i \left(\frac{u_i^*}{a_i} \right) + J_j, \end{aligned} \quad (39)$$

for $i = 1, 2, \dots, n$, $j = 1, 2, \dots, m$. That is

$$\begin{aligned} -a_i x_i^* + \sum_{j=1}^m c_{ij} F_j(y_j^*) + \sum_{j=1}^m p_{ij} V_j(y_j^*) + I_i &= 0, \\ -b_j y_j^* + \sum_{i=1}^n d_{ji} G_i(x_i^*) + \sum_{i=1}^n q_{ji} U_i(x_i^*) + J_j &= 0, \end{aligned} \quad (40)$$

for $i = 1, 2, \dots, n$, $j = 1, 2, \dots, m$, which implies that (x^*, y^*) is an equilibrium point of system (1). Moreover, it follows from Theorem 6 that (x^*, y^*) is uniformly stable. The proof is completed. $\square$

Corollary 8. Under assumption (H), the system (13) is uniformly stable, if $\tilde{S}_1 > 0$, $\tilde{T}_1 > 0$, and $\tilde{S}_1 \tilde{T}_1 > \tilde{S}_2 \tilde{T}_2$ hold, where

$$\tilde{S}_1 = 1 - \max_{1 \leq i \leq n} \{a_i\}, \quad \tilde{T}_1 = 1 - \max_{1 \leq j \leq m} \{b_j\},$$

$$\begin{aligned}\tilde{S}_2 &= \sum_{i=1}^n \max_{1 \leq j \leq m} \{ |c_{ij}| F_j \} + \sum_{i=1}^n \max_{1 \leq j \leq m} \{ |p_{ij}| V_j \} e^{-\tau}, \\ \tilde{T}_2 &= \sum_{j=1}^m \max_{1 \leq i \leq n} \{ |d_{ji}| G_i \} + \sum_{j=1}^m \max_{1 \leq i \leq n} \{ |q_{ji}| U_i \} e^{-\tau}.\end{aligned}\quad (41)$$

Proof. Similar to the proof of Theorem 6, we can obtain the above Corollary 8; thus, we omit it. $\square$

Corollary 9. Under assumption (H) and the conditions of Corollary 8, the system (13) has a unique equilibrium point, which is uniformly stable if $\tilde{W}_1 < \min_{1 \leq j \leq m} \{b_j\}$ and $\tilde{W}_2 < \min_{1 \leq i \leq n} \{a_i\}$ hold, where

$$\begin{aligned}\tilde{W}_1 &= \sum_{i=1}^n \max_{1 \leq j \leq m} \{ |c_{ij}| F_j \} + \sum_{i=1}^n \max_{1 \leq j \leq m} \{ |p_{ij}| V_j \}, \\ \tilde{W}_2 &= \sum_{j=1}^m \max_{1 \leq i \leq n} \{ |d_{ji}| G_i \} + \sum_{j=1}^m \max_{1 \leq i \leq n} \{ |q_{ji}| U_i \}.\end{aligned}\quad (42)$$

Proof. Similar to the proof of Theorem 7, we can obtain the above Corollary 9; thus, we omit it. $\square$

Remark 10. In [25], the authors investigated α -stability and α -synchronization of fractional-order neural networks without delays. In [28], the authors introduced a class of fractional-order chaotic neural networks without delays and discussed the synchronization of such networks. In [29], the authors took the constant delay into account and discussed the dynamic analysis of a class of fractional-order neural networks with constant delay. In [35], the authors investigated the uniform stability of fractional-order complex-valued neural networks with constant delay. Different from the previous works, here, we have viewed the stability analysis of fractional-order BAM neural networks with delays in the leakage terms.

Remark 11. In [29, 35], several delay-independent stability conditions were given for fractional-order neural networks with constant delay. In this paper, a delay-dependent stability condition was provided. It is known that delay-dependent conditions are usually less conservative than delay-independent ones, especially in the case when the delay size is small [10]. In addition, the positive constants c_i ($i = 0, 1, \dots, n$) in the model of [29] was required satisfying $0 < c_i < 1$ ($i = 0, 1, \dots, n$). However, the obtained results in this paper show that when the leakage delay $\sigma > 0$, the positive constants $a_i > 1$ ($i = 0, 1, \dots, n$) and $b_j > 1$ ($j = 0, 1, \dots, m$) could be possible, and the simulation examples in the next section verify the validity of our results.

4. Examples

Example 1. Consider the following fractional-order BAM neural networks with delays in the leakage terms:

$$\begin{aligned}D^\alpha x_i(t) &= -a_i x_i(t - \sigma) + \sum_{j=1}^2 c_{ij} F_j(y_j(t)) \\ &\quad + \sum_{j=1}^2 p_{ij} V_j(y_j(t - \tau)) + I_i, \quad i = 1, 2, \\ D^\alpha y_j(t) &= -b_j y_j(t - \sigma) + \sum_{i=1}^2 d_{ji} G_i(x_i(t)) \\ &\quad + \sum_{i=1}^2 q_{ji} U_i(x_i(t - \tau)) + J_j, \quad j = 1, 2,\end{aligned}\quad (43)$$

where $\alpha = 0.95$, $\sigma = 0.25$, $\tau = 0.50$, $A = \text{diag}(0.55, 0.60)$, $B = \text{diag}(0.50, 0.50)$,

$$\begin{aligned}C &= \begin{bmatrix} 1.22 & 0.80 \\ 0.65 & -0.45 \end{bmatrix}, & D &= \begin{bmatrix} 0.55 & 0.43 \\ -0.32 & 0.42 \end{bmatrix}, \\ P &= \begin{bmatrix} 0.38 & -0.32 \\ 0.45 & 0.80 \end{bmatrix}, \\ Q &= \begin{bmatrix} -0.62 & 0.34 \\ 0.45 & 1.10 \end{bmatrix}, & I &= [0.84, 1.22]^T, \\ J &= [-0.48, 0.75]^T,\end{aligned}\quad (44)$$

$$G_1(x) = G_2(x) = U_1(x) = U_2(x)$$

$$= \frac{1}{10} (|x + 1| + |x - 1|),$$

$$F_1(y) = F_2(y) = V_1(y) = V_2(y)$$

$$= \frac{1}{20} (|y + 1| + |y - 1|).$$

By calculation, $F_1 = F_2 = V_1 = V_2 = 0.1$, $G_1 = G_2 = U_1 = U_2 = 0.2$, $S_1 = 1 - 0.60e^{-0.25} = 0.5327$, $T_1 = 1 - 0.5e^{-0.25} = 0.6106$, $S_2 = 1.22 \times 0.1 + 0.65 \times 0.1 + (0.38 \times 0.1 + 0.80 \times 0.1)e^{-0.5} = 0.2586$, and $T_2 = 0.55 \times 0.2 + 0.42 \times 0.2 + (0.62 \times 0.2 + 1.10 \times 0.2)e^{-0.5} = 0.4026$, which satisfy $S_1 T_1 > S_2 T_2$; according to Theorem 6, when we select the appropriate initial values, the system (43) could realize uniform stability. Furthermore, we have $W_1 = 1.22 \times 0.1 + 0.65 \times 0.1 + 0.38 \times 0.1 + 0.80 \times 0.1 = 0.3050 < \min_{1 \leq j \leq 2} \{b_j\} = 0.50$, $W_2 = 0.55 \times 0.2 + 0.42 \times 0.2 + 0.62 \times 0.2 + 1.10 \times 0.2 = 0.5380 < \min_{1 \leq i \leq 2} \{a_i\} = 0.55$; by utilizing Theorem 7, we can obtain that the system (43) has a unique equilibrium point which is uniformly stable.

In order to check the validity of Theorems 6 and 7, the following five cases are given: case 1 with the initial values $(x_1, x_2, y_1, y_2)^T = (-2.5, 4.0, 3.5, -5.0)^T$, case 2 with the initial values $(x_1, x_2, y_1, y_2)^T = (6.5, -3.0, -7.0, 4.5)^T$, case 3 with the initial values $(x_1, x_2, y_1, y_2)^T = (3.0, 8.0, -1.5, -2.0)^T$, case 4 with the initial values $(x_1, x_2, y_1, y_2)^T =$

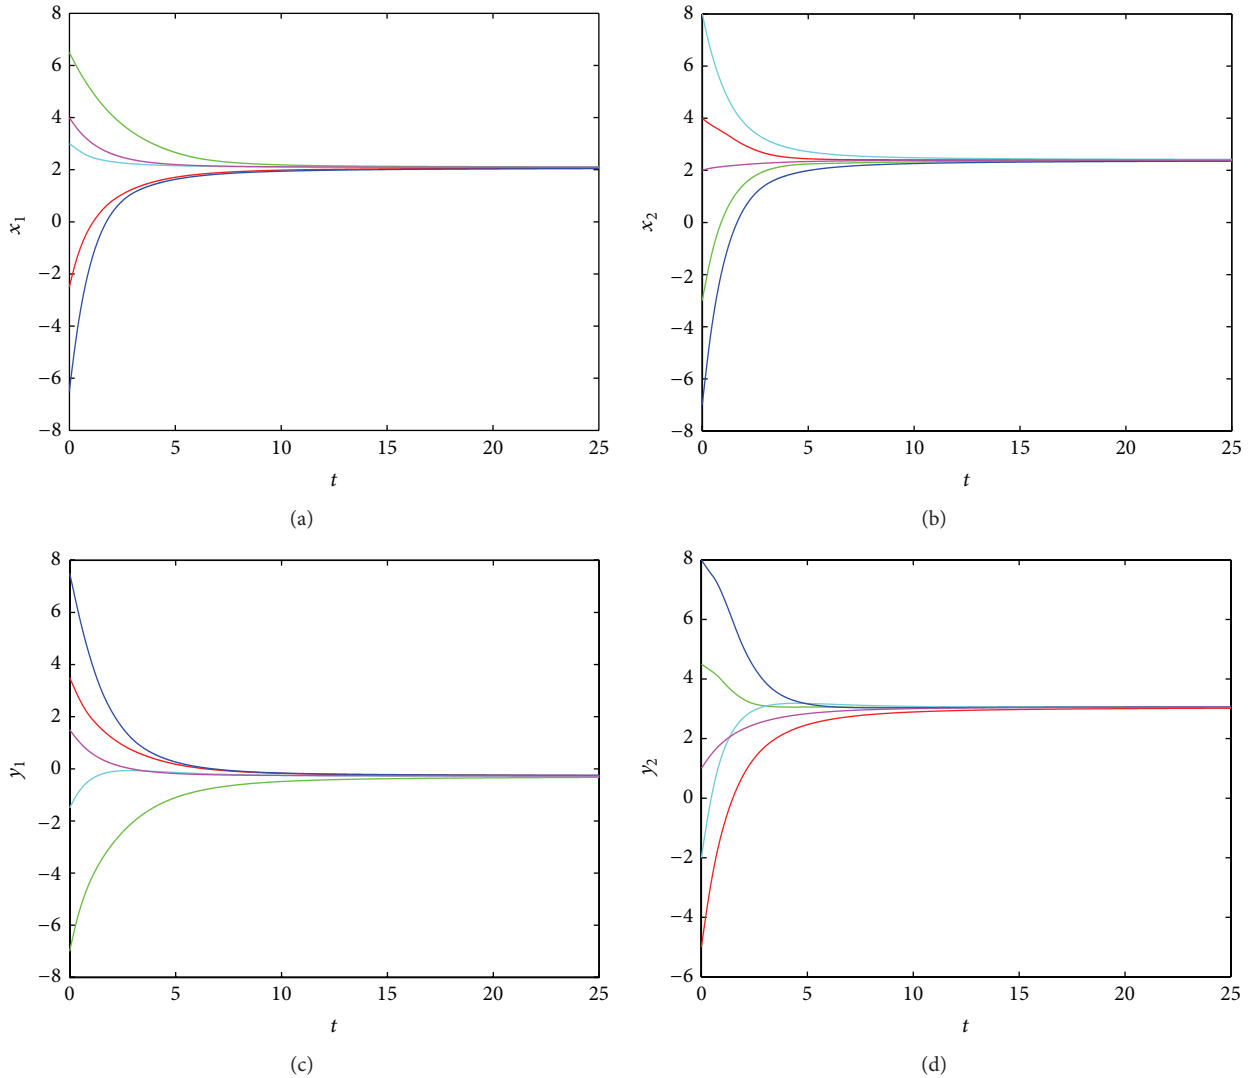


FIGURE 1: Transient states of the fractional-order BAM neural networks in Example 1 with $\alpha = 0.95$, $\sigma = 0.25$, and $\tau = 0.50$.

$(-6.5, -7.0, 7.5, 8.0)^T$, and case 5 with the initial values $(x_1, x_2, y_1, y_2)^T = (4.0, 2.0, 1.5, 1.0)^T$. The time responses of state variables are shown in Figure 1.

When $\sigma = 0$, consider the following three cases: case 1 with the initial values $(x_1, x_2, y_1, y_2)^T = (3.0, 8.0, -1.5, -2.0)^T$, case 2 with the initial values $(x_1, x_2, y_1, y_2)^T = (-6.5, -7.0, 7.5, 8.0)^T$, and case 3 with the initial values $(x_1, x_2, y_1, y_2)^T = (4.0, 2.0, 1.5, 1.0)^T$. The time responses of state variables are shown in Figure 2 with the leakage delay $\sigma = 0$.

Example 2. Consider the following fractional-order BAM neural networks with delays in the leakage terms:

$$D^\alpha x_i(t) = -a_i x_i(t - \sigma) + \sum_{j=1}^2 c_{ij} F_j(y_j(t)) + \sum_{j=1}^2 p_{ij} V_j(y_j(t - \tau)) + I_i, \quad i = 1, 2,$$

$$D^\alpha y_j(t) = -b_j y_j(t - \sigma) + \sum_{i=1}^2 d_{ji} G_i(x_i(t)) + \sum_{i=1}^2 q_{ji} U_i(x_i(t - \tau)) + J_j, \quad j = 1, 2, \quad (45)$$

where $\alpha = 0.98$, $\sigma = 0.20$, $\tau = 0.40$, $A = \text{diag}(0.50, 0.65)$, $B = \text{diag}(0.55, 0.42)$,

$$C = \begin{bmatrix} 0.55 & -0.75 \\ 0.85 & 0.66 \end{bmatrix}, \quad D = \begin{bmatrix} 0.76 & 0.42 \\ 0.39 & -0.68 \end{bmatrix},$$

$$P = \begin{bmatrix} 0.22 & 0.46 \\ -0.75 & 0.82 \end{bmatrix},$$

$$Q = \begin{bmatrix} -0.24 & 0.65 \\ 0.37 & 0.55 \end{bmatrix}, \quad I = [0.50, -0.45]^T,$$

$$J = [-0.20, 0.30]^T,$$

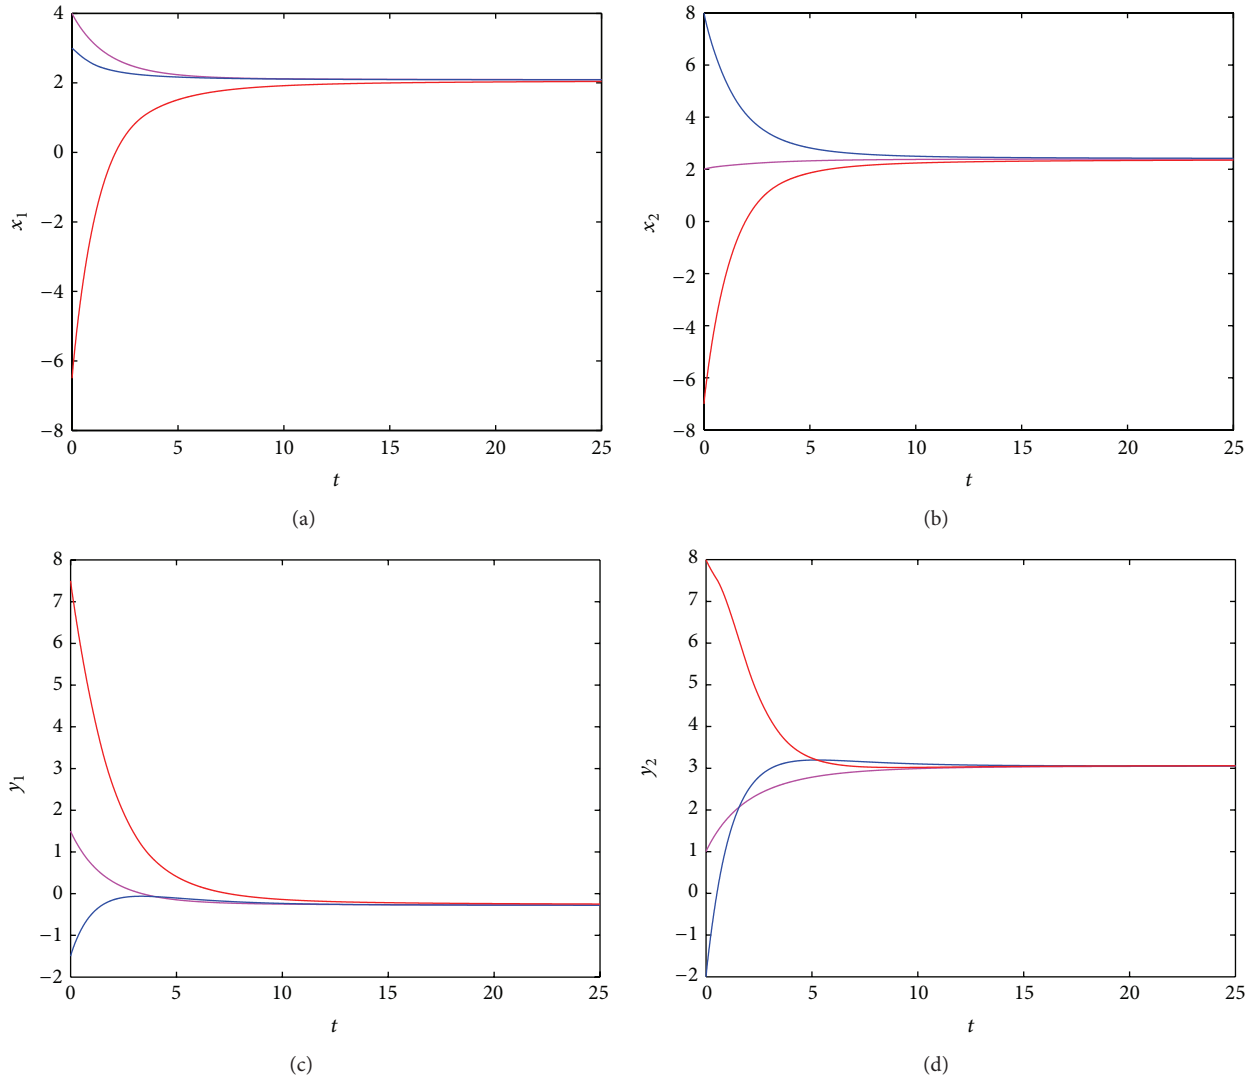


FIGURE 2: Transient states of the fractional-order BAM neural networks in Example 1 with $\alpha = 0.95$, $\sigma = 0$, and $\tau = 0.50$.

$$\begin{aligned}
 G_1(x) &= G_2(x) = \frac{1}{10} (|x+1| + |x-1|), \\
 U_1(x) &= U_2(x) = \frac{1}{20} (|x+1| + |x-1|), \\
 F_1(y) &= F_2(y) = \frac{1}{15} (|y+1| + |y-1|), \\
 V_1(y) &= V_2(y) = \frac{1}{30} (|y+1| + |y-1|).
 \end{aligned}
 \tag{46}$$

By calculation, $F_1 = F_2 = 2/15$, $V_1 = V_2 = 1/15$, $G_1 = G_2 = 1/5$, $U_1 = U_2 = 1/10$, $S_1 = 1 - 0.65e^{-0.2} = 0.4678$, $T_1 = 1 - 0.55e^{-0.2} = 0.5497$, $S_2 = 0.75 \times 2/15 + 0.85 \times 2/15 + (0.46 \times 1/15 + 0.82 \times 1/15)e^{-0.4} = 0.2665$, and $T_2 = 0.76 \times 1/5 + 0.68 \times 1/5 + (0.65 \times 1/10 + 0.55 \times 1/10)e^{-0.4} = 0.3684$, which satisfy $S_1 T_1 > S_2 T_2$; according to Theorem 6, when we select the appropriate initial values, the system (45) could realize uniform stability. Furthermore, we have $W_1 = 0.75 \times 2/15 +$

$0.85 \times 2/15 + 0.46 \times 1/15 + 0.82 \times 1/15 = 0.2987 < \min_{1 \leq j \leq 2} \{b_j\} = 0.42$, $W_2 = 0.76 \times 1/5 + 0.68 \times 1/5 + 0.65 \times 1/10 + 0.55 \times 1/10 = 0.4080 < \min_{1 \leq i \leq 2} \{a_i\} = 0.50$; by utilizing Theorem 7, we can obtain that the system (45) has a unique equilibrium point which is uniformly stable.

In order to check the validity of Theorems 6 and 7, the following five cases are given: case 1 with the initial values $(x_1, x_2, y_1, y_2)^T = (-2.5, 4.0, 3.5, -5.0)^T$, case 2 with the initial values $(x_1, x_2, y_1, y_2)^T = (6.5, -3.0, -7.0, 4.5)^T$, case 3 with the initial values $(x_1, x_2, y_1, y_2)^T = (3.0, 8.0, -1.5, -2.0)^T$, case 4 with the initial values $(x_1, x_2, y_1, y_2)^T = (-6.5, -7.0, 7.5, 8.0)^T$, and case 5 with the initial values $(x_1, x_2, y_1, y_2)^T = (4.0, 2.0, 1.5, 1.0)^T$. The time responses of state variables are shown in Figure 3.

When $\sigma = 0$, consider the following three cases: case 1 with the initial values $(x_1, x_2, y_1, y_2)^T = (-2.5, 4.0, 3.5, -5.0)^T$, case 2 with the initial values $(x_1, x_2, y_1, y_2)^T = (3.0, 8.0, -1.5, -2.0)^T$, and case 3 with

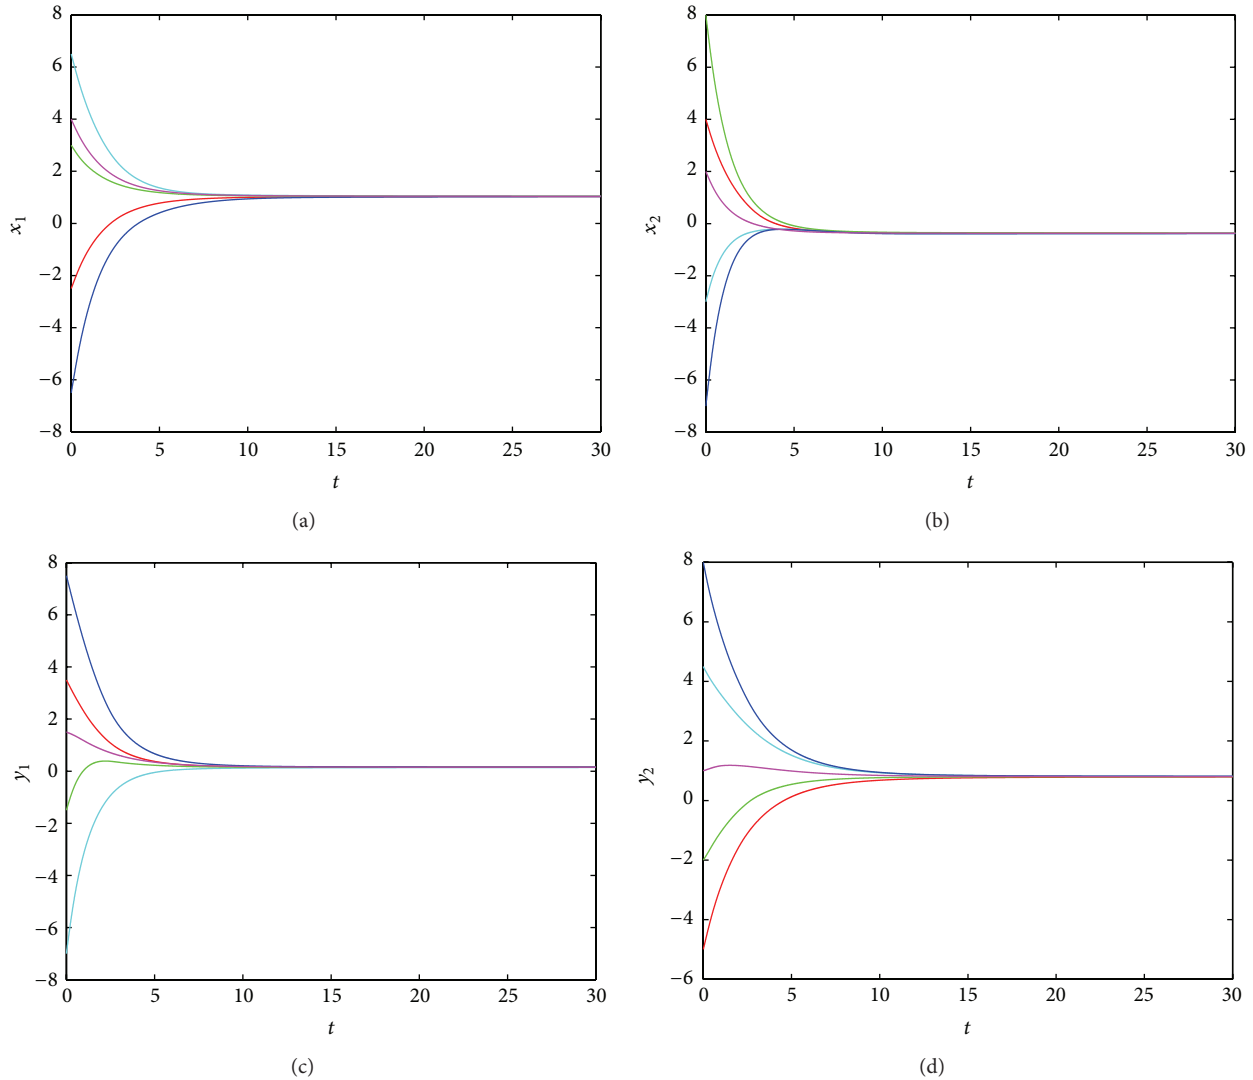


FIGURE 3: Transient states of the fractional-order BAM neural networks in Example 2 with $\alpha = 0.98$, $\sigma = 0.20$, and $\tau = 0.40$.

the initial values $(x_1, x_2, y_1, y_2)^T = (-6.5, -7.0, 7.5, 8.0)^T$. The time responses of state variables are shown in Figure 4 with the leakage delay $\sigma = 0$.

Example 3. Consider the following fractional-order BAM neural networks with delays in the leakage terms:

$$\begin{aligned}
 D^\alpha x_i(t) &= -a_i x_i(t - \sigma) + \sum_{j=1}^2 c_{ij} F_j(y_j(t)) \\
 &\quad + \sum_{j=1}^2 p_{ij} V_j(y_j(t - \tau)) + I_i, \quad i = 1, 2, \\
 D^\alpha y_j(t) &= -b_j y_j(t - \sigma) + \sum_{i=1}^2 d_{ji} G_i(x_i(t)) \\
 &\quad + \sum_{i=1}^2 q_{ji} U_i(x_i(t - \tau)) + J_j, \quad j = 1, 2,
 \end{aligned} \tag{47}$$

where $\alpha = 0.95$, $\sigma = 0.50$, $\tau = 0.50$, $A = \text{diag}(1.30, 1.40)$, $B = \text{diag}(1.20, 1.15)$,

$$C = \begin{bmatrix} 0.45 & 0.25 \\ 0.36 & -0.27 \end{bmatrix}, \quad D = \begin{bmatrix} -0.45 & 0.43 \\ 0.29 & 0.35 \end{bmatrix},$$

$$P = \begin{bmatrix} 0.38 & 0.33 \\ -0.45 & 0.52 \end{bmatrix},$$

$$Q = \begin{bmatrix} 0.62 & 0.34 \\ -0.36 & -0.48 \end{bmatrix}, \quad I = [0.84, 1.22]^T,$$

$$J = [-0.48, 0.75]^T,$$

$$G_1(x) = G_2(x) = U_1(x) = U_2(x)$$

$$= \frac{1}{10} (|x + 1| + |x - 1|),$$

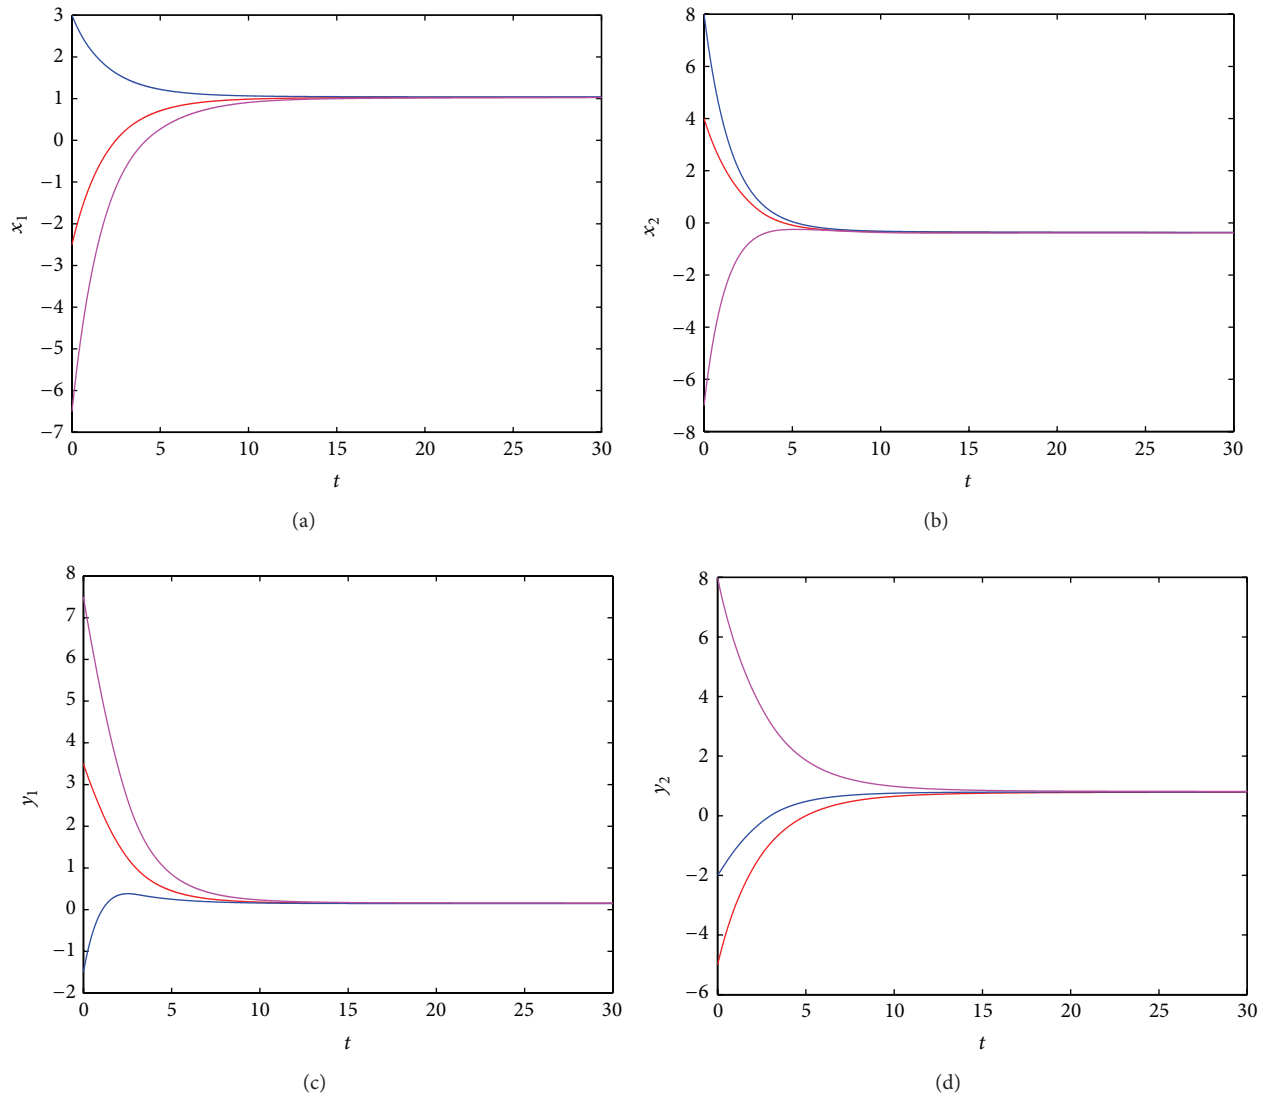


FIGURE 4: Transient states of the fractional-order BAM neural networks in Example 2 with $\alpha = 0.98$, $\sigma = 0$, and $\tau = 0.40$.

$$\begin{aligned}
 F_1(y) &= F_2(y) = V_1(y) = V_2(y) \\
 &= \frac{1}{20} (|y+1| + |y-1|).
 \end{aligned}
 \tag{48}$$

By calculation, $F_1 = F_2 = V_1 = V_2 = 0.1$, $G_1 = G_2 = U_1 = U_2 = 0.2$, $S_1 = 1 - 1.4e^{-0.5} = 0.1509$, $T_1 = 1 - 1.2e^{-0.5} = 0.2722$, $S_2 = 0.45 \times 0.1 + 0.36 \times 0.1 + (0.38 \times 0.1 + 0.52 \times 0.1)e^{-0.5} = 0.1356$, and $T_2 = 0.45 \times 0.2 + 0.35 \times 0.2 + (0.62 \times 0.2 + 0.48 \times 0.2)e^{-0.5} = 0.3954$, which satisfy $S_1 T_1 > S_2 T_2$; according to Theorem 6, when we select the appropriate initial values, the system (47) could realize uniform stability. Furthermore, we have $W_1 = 0.45 \times 0.1 + 0.36 \times 0.1 + 0.38 \times 0.1 + 0.52 \times 0.1 = 0.171 < \min_{1 \leq j \leq 2} \{b_j\} = 1.15$, $W_2 = 0.45 \times 0.2 + 0.35 \times 0.2 + 0.62 \times 0.2 + 0.48 \times 0.2 = 0.38 < \min_{1 \leq i \leq 2} \{a_i\} = 1.30$; by utilizing Theorem 7, we can obtain that the system (47) has an unique equilibrium point which is uniformly stable.

In order to check the validity of Theorems 6 and 7, the following five cases are given: case 1 with the initial values $(x_1, x_2, y_1, y_2)^T = (-2.5, 4.0, 3.5, -5.0)^T$, case 2 with the initial values $(x_1, x_2, y_1, y_2)^T = (6.5, -3.0, -7.0, 4.5)^T$, case 3 with the initial values $(x_1, x_2, y_1, y_2)^T = (3.0, 8.0, -1.5, -2.0)^T$, case 4 with the initial values $(x_1, x_2, y_1, y_2)^T = (-6.5, -7.0, 7.5, 8.0)^T$, and case 5 with the initial values $(x_1, x_2, y_1, y_2)^T = (4.0, 2.0, 1.5, 1.0)^T$. The time responses of state variables are shown in Figure 5.

5. Conclusions

In this paper, the uniform stability for a class of fractional-order BAM neural networks with leakage delays has been discussed. Several sufficient conditions ensuring the uniform stability of such systems have been derived based on inequality technique and analysis method. Meanwhile, the existence,

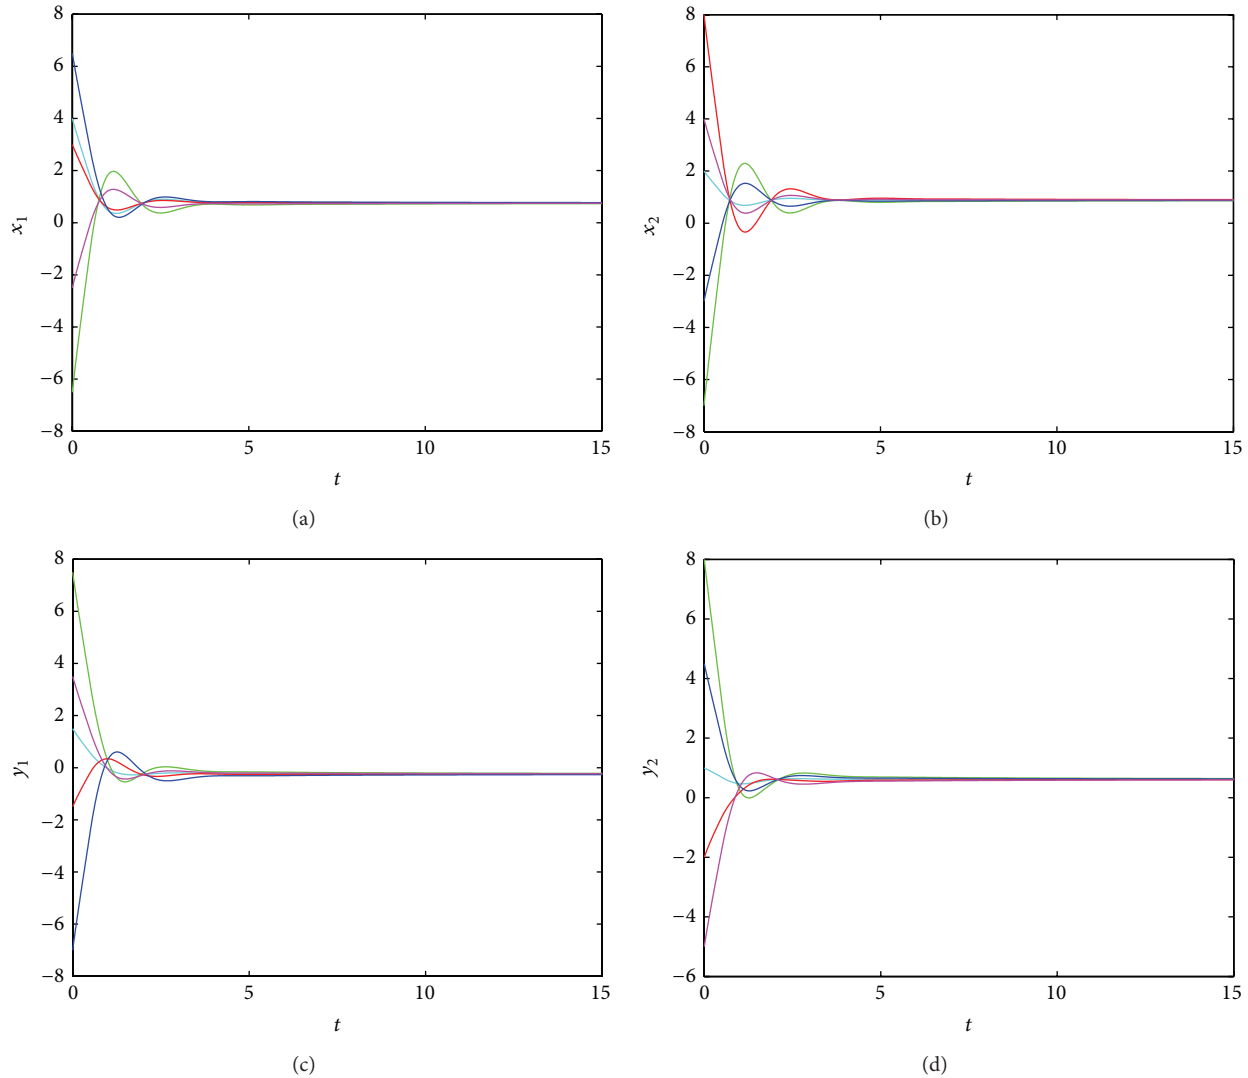


FIGURE 5: Transient states of the fractional-order BAM neural networks in Example 3 with $\alpha = 0.95$, $\sigma = 0.50$, and $\tau = 0.50$.

uniqueness, and uniform stability of the equilibrium point have been investigated. Finally, three simulation examples have been provided to demonstrate the effectiveness of the obtained results.

We would like to point out that it is possible to extend our main results to other complex systems [37–41] and establish novel stability conditions with less conservatism by using more up-to-date techniques in [42–46]. The corresponding results will appear in the near future.

Conflict of Interests

The authors declare that there is no conflict of interests regarding the publication of this paper.

Acknowledgments

This work was supported by the National Natural Science Foundation of China under Grants 61273021 and 11172247

and was supported in part by the Natural Science Foundation Project of CQ cstc2013jjB40008.

References

- [1] B. Kosko, "Adaptive bidirectional associative memories," *Applied Optics*, vol. 26, no. 23, pp. 4947–4960, 1987.
- [2] J. Cao and L. Wang, "Exponential stability and periodic oscillatory solution in BAM networks with delays," *IEEE Transactions on Neural Networks*, vol. 13, no. 2, pp. 457–463, 2002.
- [3] J. H. Park, "A novel criterion for global asymptotic stability of BAM neural networks with time delays," *Chaos, Solitons and Fractals*, vol. 29, no. 2, pp. 446–453, 2006.
- [4] D. W. Ho, J. Liang, and J. Lam, "Global exponential stability of impulsive high-order BAM neural networks with time-varying delays," *Neural Networks*, vol. 19, no. 10, pp. 1581–1590, 2006.
- [5] Q. Song and J. Cao, "Global exponential stability of bidirectional associative memory neural networks with distributed delays,"

- Journal of Computational and Applied Mathematics*, vol. 202, no. 2, pp. 266–279, 2007.
- [6] X. Lou and B. Cui, “New criteria on global exponential stability of BAM neural networks with distributed delays and reaction-diffusion terms,” *International Journal of Neural Systems*, vol. 17, no. 1, pp. 43–52, 2007.
 - [7] P. Balasubramaniam and R. Rakkiyappan, “Global exponential stability for neutral-type BAM neural networks with time-varying delays,” *International Journal of Computer Mathematics*, vol. 87, no. 9, pp. 2064–2075, 2010.
 - [8] R. Sakthivel, R. Samidurai, and S. M. Anthoni, “New exponential stability criteria for stochastic BAM neural networks with impulses,” *Physica Scripta*, vol. 82, no. 4, Article ID 045802, 2010.
 - [9] C. Li, C. Li, X. Liao, and T. Huang, “Impulsive effects on stability of high-order BAM neural networks with time delays,” *Neurocomputing*, vol. 74, no. 10, pp. 1541–1550, 2011.
 - [10] Q. Zhu and J. Cao, “Stability analysis of markovian jump stochastic BAM neural networks with impulse control and mixed time delays,” *IEEE Transactions on Neural Networks and Learning Systems*, vol. 23, no. 3, pp. 467–479, 2012.
 - [11] Y. Wang and J. Cao, “Exponential stability of stochastic higher-order BAM neural networks with reaction-diffusion terms and mixed time-varying delays,” *Neurocomputing*, vol. 119, pp. 192–200, 2013.
 - [12] A. Zhang, J. Qiu, and J. She, “Existence and global exponential stability of periodic solution for high-order discrete-time BAM neural networks,” *Neural Networks*, vol. 50, pp. 98–109, 2014.
 - [13] K. Gopalsamy, “Leakage delays in BAM,” *Journal of Mathematical Analysis and Applications*, vol. 325, no. 2, pp. 1117–1132, 2007.
 - [14] S. Peng, “Global attractive periodic solutions of BAM neural networks with continuously distributed delays in the leakage terms,” *Nonlinear Analysis: Real World Applications*, vol. 11, no. 3, pp. 2141–2151, 2010.
 - [15] B. Liu, “Global exponential stability for BAM neural networks with time-varying delays in the leakage terms,” *Nonlinear Analysis: Real World Applications*, vol. 14, no. 1, pp. 559–566, 2013.
 - [16] S. Lakshmanan, J. H. Park, T. H. Lee, H. Y. Jung, and R. Rakkiyappan, “Stability criteria for BAM neural networks with leakage delays and probabilistic time-varying delays,” *Applied Mathematics and Computation*, vol. 219, no. 17, pp. 9408–9423, 2013.
 - [17] Q. Zhu, R. Rakkiyappan, and A. Chandrasekar, “Stochastic stability of Markovian jump BAM neural networks with leakage delays and impulse control,” *Neurocomputing*, vol. 136, pp. 136–151, 2014.
 - [18] I. Podlubny, *Fractional Differential Equations*, vol. 198 of *Mathematics in Science and Engineering*, Technical University of Kosice, Košice, Slovakia, 1999.
 - [19] K. Diethelm, *The Analysis of Fractional Differential Equations*, vol. 2004, Springer, Berlin, Germany, 2010.
 - [20] A. A. Kilbas, H. M. Srivastava, and J. J. Trujillo, *Theory and Applications of Fractional Differential Equations*, vol. 204 of *North-Holland Mathematics Studies*, Elsevier Science, Amsterdam, The Netherlands, 2006.
 - [21] P. Arena, R. Caponetto, L. Fortuna, and D. Porto, “Bifurcation and chaos in noninteger order cellular neural networks,” *International Journal of Bifurcation and Chaos*, vol. 8, no. 7, pp. 1527–1539, 1998.
 - [22] P. Arena, L. Fortuna, and D. Porto, “Chaotic behavior in noninteger-order cellular neural networks,” *Physical Review E*, vol. 61, no. 1, pp. 776–781, 2000.
 - [23] S. Zhou, H. Li, and Z. Zhu, “Chaos control and synchronization in a fractional neuron network system,” *Chaos, Solitons and Fractals*, vol. 36, no. 4, pp. 973–984, 2008.
 - [24] A. Boroomand and M. B. Menhaj, “Fractional-order Hopfield neural networks,” in *Advances in Neuro-Information Processing*, vol. 5506 of *Lecture Notes in Computer Science*, pp. 883–890, Springer, Berlin, Germany, 2009.
 - [25] J. Yu, C. Hu, and H. Jiang, “ α -stability and α -synchronization for fractional-order neural networks,” *Neural Networks*, vol. 35, pp. 82–87, 2012.
 - [26] X. Huang, Z. Zhao, Z. Wang, and Y. Li, “Chaos and hyperchaos in fractional-order cellular neural networks,” *Neurocomputing*, vol. 94, pp. 13–21, 2012.
 - [27] E. Kaslik and S. Sivasundaram, “Nonlinear dynamics and chaos in fractional-order neural networks,” *Neural Networks*, vol. 32, pp. 245–256, 2012.
 - [28] L. Chen, J. Qu, Y. Chai, R. Wu, and G. Qi, “Synchronization of a class of fractional-order chaotic neural networks,” *Entropy*, vol. 15, no. 8, pp. 3265–3276, 2013.
 - [29] L. Chen, Y. Chai, R. Wu, T. Ma, and H. Zhai, “Dynamic analysis of a class of fractional-order neural networks with delay,” *Neurocomputing*, vol. 111, pp. 190–194, 2013.
 - [30] J. Chen, Z. Zeng, and P. Jiang, “Global Mittag-Leffler stability and synchronization of memristor-based fractional-order neural networks,” *Neural Networks*, vol. 51, pp. 1–8, 2014.
 - [31] A. Alofi, J. Cao, A. Elaiw, and A. Al-Mazrooei, “Delay-dependent stability criterion of Caputo fractional neural networks with distributed delay,” *Discrete Dynamics in Nature and Society*, vol. 2014, Article ID 529358, 6 pages, 2014.
 - [32] J. Yu, C. Hu, H. Jiang, and X. Fan, “Projective synchronization for fractional neural networks,” *Neural Networks*, vol. 49, pp. 87–95, 2014.
 - [33] A. Meyer-Base, R. Roberts, and V. Thummler, “Local uniform stability of competitive neural networks with different time-scales under vanishing perturbations,” *Neurocomputing*, vol. 73, no. 4–6, pp. 770–775, 2010.
 - [34] A. Arbi, C. Aouiti, and A. Touati, “Uniform asymptotic stability and global asymptotic stability for time-delay Hopfield neural networks,” *IFIP Advances in Information and Communication Technology*, vol. 381, no. 1, pp. 483–492, 2012.
 - [35] R. Rakkiyappan, J. Cao, and G. Velmurugan, “Existence and uniform stability analysis of fractional-order complex-valued neural networks with time delays,” *IEEE Transactions on Neural Networks and Learning Systems*, 2014.
 - [36] Z. Hou, H. Zhu, and C. Feng, “Existence and global uniform asymptotic stability of almost periodic solutions for cellular neural networks with discrete and distributed delays,” *Journal of Applied Mathematics*, vol. 2013, Article ID 516293, 6 pages, 2013.
 - [37] H. Dong, Z. Wang, and H. Gao, “Distributed H_∞ filtering for a class of Markovian jump nonlinear time-delay systems over lossy sensor networks,” *IEEE Transactions on Industrial Electronics*, vol. 60, no. 10, pp. 4665–4672, 2013.
 - [38] B. Shen, Z. Wang, D. Ding, and H. Shu, “ H_∞ state estimation for complex networks with uncertain inner coupling and incomplete measurements,” *IEEE Transactions on Neural Networks and Learning Systems*, vol. 24, no. 12, pp. 2027–2037, 2013.

- [39] L. Qin, X. He, and D. H. Zhou, "A survey of fault diagnosis for swarm systems," *Systems Science & Control Engineering*, vol. 2, no. 1, pp. 13–23, 2014.
- [40] Q. Liu, Z. Wang, X. He, and D. H. Zhou, "A survey of event-based strategies on control and estimation," *Systems Science & Control Engineering*, vol. 2, no. 1, pp. 90–97, 2014.
- [41] B. Shen, "A survey on the applications of the Krein-space theory in signal estimation," *Systems Science & Control Engineering*, vol. 2, no. 1, pp. 143–149, 2014.
- [42] J. Hu, Z. Wang, B. Shen, and H. Gao, "Quantised recursive filtering for a class of nonlinear systems with multiplicative noises and missing measurements," *International Journal of Control*, vol. 86, no. 4, pp. 650–663, 2013.
- [43] X. He, Z. Wang, X. Wang, and D. H. Zhou, "Networked strong tracking filtering with multiple packet dropouts: algorithms and applications," *IEEE Transactions on Industrial Electronics*, vol. 61, no. 3, pp. 1454–1463, 2014.
- [44] Z. Wang, D. Ding, H. Dong, and H. Shu, " H_∞ consensus control for multi-agent systems with missing measurements: the finite-horizon case," *Systems & Control Letters*, vol. 62, no. 10, pp. 827–836, 2013.
- [45] Z. Wang, H. Dong, B. Shen, and H. Gao, "Finite-horizon H_∞ filtering with missing measurements and quantization effects," *IEEE Transactions on Automatic Control*, vol. 58, no. 7, pp. 1707–1718, 2013.
- [46] H. Dong, Z. Wang, and H. Gao, "Fault detection for Markovian jump systems with sensor saturations and randomly varying nonlinearities," *IEEE Transactions on Circuits and Systems I*, vol. 59, no. 10, pp. 2354–2362, 2012.